# LED VAPOR TIGHT LINEAR


## Installation Guide

/! WARNING


- 1. To avoid electric shock, disconnect power at source prior to installation.
- 2. The installation should be performed by qualified electricians or lighting technicians.
- 3. Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
- 4. Do not touch the fixture while it is in service.
- 5. Operating temperature is -40 °C to 45 °C.
- 6. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

### Installation and instructions


Surface mount (default setting)

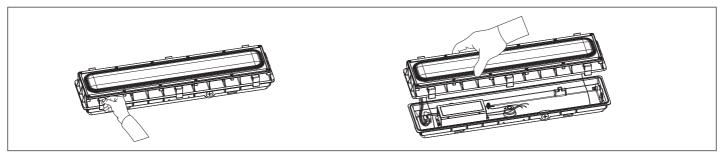

1. Unfasten the latches and separate the led module and the power housing.

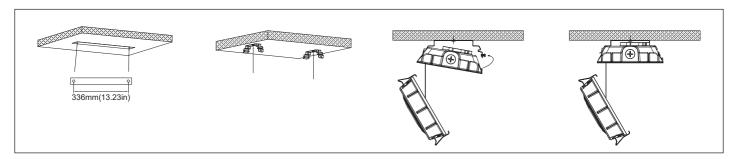


- 2. Use the leveling ruler to settle the screws hole then secure the housing to the ceiling with screws.
- Connect wires (voltage to black, white to common, and green to ground);
  Secure the led module to the housing and fasten six latches, ensuring water does not enter fixture.



#### V-Hook Mounting

- 1. Put the mounting bracket on the housing, tighten it with screws.
- 2. Fasten the V hook hang it with the chain.



#### **WIRING DIAGRAM**

For 1-10V dimming version, please check wiring diagram below.

Black	$\frown$	Line
White		Neutral
Green/Yellow Green	$\widetilde{\mathcal{C}}$	Ground
Purple	$\mathcal{O}^{-}$	DIM+
Gray	$\widetilde{\mathcal{O}}$	DIM-
	` _	