



Product Overview

Featuring a modern, low-profile design, series GKOWPG13 Full Cutoff Wall Packs are an energy-efficient replacement for a traditional metal halide wall pack, up to 400W. The full cutoff design minimizes vertical light to reduce glare and light pollution.

Key Features

CONSTRUCTION:

- Rugged die-cast aluminum housing.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.

FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Full cutoff design minimizes glare and light pollution.
- Light engines are available in standard 4000K and 5000K configurations.
- A range of lumen options available from 3,600 to 13,400 Lumens, replaces up to 400W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

ELECTRICAL:

- Universal 120-277V input voltage.
- THD: ≤20%, Power Factor: ≥90%.

CONTROLS:

- Optional button photocell for additional energy savings - PO 120-277V.
- Optional multi-level motion sensor - BRI619 (27W/45W) or BRI823 (70W/100W).

INSTALLATION:

- Wall mount or junction box mount options are available.

WARRANTY:

- 5 Year Limited Warranty.

LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified.
- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 104°F (-40°C to 40°C).




Performance Data

Lumen Output

System Watts	Voltage	4000K(70CRI)		5000K(70CRI)	
		Lumens	Efficacy	Lumens	Efficacy
27W	120-277V	3600lm	133lm/W	3600lm	133lm/W
45W	120-277V	5800lm	129lm/W	5800lm	129lm/W
70W	120-277V	9100lm	130lm/W	9100lm	130lm/W
100W	120-277V	13400lm	134lm/W	13400lm	134lm/W


Dimensions & Weight

27W / 45W

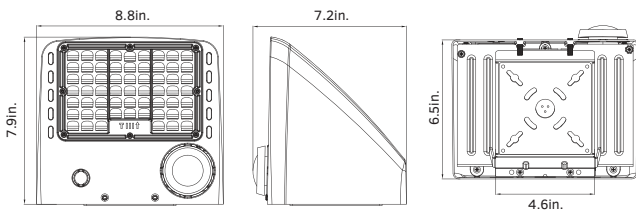

Weight
27W: 5.63lb.
45W: 5.92lb.

70W / 100W

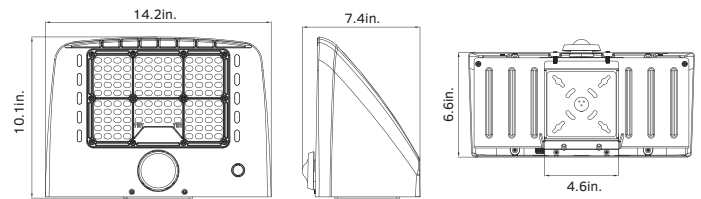

Weight
70W: 9.22lb.
100W: 9.41lb.

Ordering Information

Full Cutoff Wall Pack Series GKOWPG13

Example: GKOWPG1345W27V50KDPO

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Optional)	Motion Sensor (Optional)	Battery Backup (Optional)	Internal Code
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
GKOWPG13	27W 45W 70W 100W	27V 120-277V	40K 4000K 50K 5000K	D Dark Bronze B Black W White	PO 120-277V Photocell Blank Without Photocell	M With Sensor Blank Without Sensor	B With Battery Blank Without Battery	Blank Alphanumeric

Note: Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification.