


**SMALL SIZE:  
GKOAL01 70W**

**MEDIUM SIZE:  
GKOALG6 100W / 150W / 200W**

**LARGE SIZE  
GKOALG6 240W / 300W / 350W**

## Product Overview

Tier 1 Area Lights are an energy-efficient replacement for a traditional metal halide area light, up to 1,000W. Featuring premium quality components for optimal performance, they deliver uniform, energy conscious illumination to parking lots and commercial lighting applications.



## Key Features

### CONSTRUCTION:

- Rugged single-piece, die-cast aluminum housing with integral heat sink fins.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.
- 3G vibration rated per ANSI C136.31, low EPA (0.56ft for 350W).
- Housing is completely sealed against moisture and environmental contaminants.

### OPTICS:

- Type III, IV, V light distribution available.
- Light engines are available in standard 4000K and 5000K configurations.
- A wide range of lumen options available from 8,750 to 51,000 Lumens, replaces up to 1,000W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

### ELECTRICAL:

- Universal 120-277V or 347-480V input voltage.
- 10KV surge protection for 120-277V and 20KV surge protection for 347-480V.
- 1-10V dimming driver(s) as default.
- THD: ≤20%, Power Factor: ≥90%.

### CONTROLS:

- Optional twist-lock photocell for additional energy savings - P0 120-277V, P3 347V, or P4 480V.

### INSTALLATION:

- Suitable for mounting heights ranging from 15'-60' in area lighting applications.
- Round pole, square pole, slipfitter and wall mount are available.
- Designed to be suitable for installation by only one person.

### WARRANTY:

- 10 Year Limited Warranty (GKOALG6).
- 5 Year Limited Warranty (GKOAL01).

### LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified (GKOALG6).
- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 113°F (-40°C to 45°C).

# Performance Data








## Lumen Output

Series / Watts	Voltage	Distribution Type	4000K(70CRI)		5000K(70CRI)	
			Lumens	Efficacy	Lumens	Efficacy
GKOAL01 / 70W	120-277V	3	9000lm	129lm/W	9000lm	129lm/W
	120-277V	4	8750lm	125lm/W	8800lm	126lm/W
	120-277V	5	9500lm	136lm/W	9500lm	136lm/W
GKOAL01 / 75W	347-480V	3	9000lm	120lm/W	9000lm	120lm/W
	347-480V	4	8750lm	117lm/W	8800lm	117lm/W
	347-480V	5	9000lm	127lm/W	9500lm	127lm/W
GKOALG6 / 100W	120-277V / 347-480V	3	14200lm	142lm/W	14200lm	142lm/W
	120-277V / 347-480V	4	14200lm	142lm/W	14200lm	142lm/W
	120-277V / 347-480V	5	14800lm	148lm/W	14800lm	148lm/W
GKOALG6 / 150W	120-277V / 347-480V	3	21200lm	141lm/W	21200lm	141lm/W
	120-277V / 347-480V	4	21200lm	141lm/W	21200lm	141lm/W
	120-277V / 347-480V	5	22200lm	148lm/W	22200lm	148lm/W
GKOALG6 / 200W	120-277V / 347-480V	3	28000lm	140lm/W	28000lm	140lm/W
	120-277V / 347-480V	4	28000lm	140lm/W	28000lm	140lm/W
	120-277V / 347-480V	5	28800lm	144lm/W	28800lm	144lm/W
GKOALG6 / 240W	120-277V / 347-480V	3	34000lm	142lm/W	34000lm	142lm/W
	120-277V / 347-480V	4	34000lm	142lm/W	34000lm	142lm/W
	120-277V / 347-480V	5	35500lm	148lm/W	35500lm	148lm/W
GKOALG6 / 300W	120-277V / 347-480V	3	42500lm	142lm/W	42500lm	142lm/W
	120-277V / 347-480V	4	42500lm	142lm/W	42500lm	142lm/W
	120-277V / 347-480V	5	43700lm	146lm/W	43700lm	146lm/W
GKOALG6 / 350W	120-277V / 347-480V	3	50000lm	143lm/W	50000lm	143lm/W
	120-277V / 347-480V	4	50000lm	143lm/W	50000lm	143lm/W
	120-277V / 347-480V	5	51000lm	146lm/W	51000lm	146lm/W








## BUG Rating

Series / Watts	Voltage	Distribution Type	B	U	G
GKOAL01 / 70W & 75W	120-277V/347-480V	3	2	0	2
GKOALG6 / 100W	120-277V/347-480V	3	2	0	2
GKOALG6 / 150W	120-277V/347-480V	3	3	0	3
GKOALG6 / 200W	120-277V/347-480V	3	3	0	3
GKOALG6 / 240W	120-277V/347-480V	3	3	0	4
GKOALG6 / 300W	120-277V/347-480V	3	3	0	4
GKOALG6 / 350W	120-277V/347-480V	3	3	0	5

## EPA of Series GKOAL01 Area Light

							
	1	2 @90°	2 @120°	2 @180°	3 @90°	3 @120°	4 @90°
70W	0.626	0.705	0.974	0.981	0.982	0.977	0.982

## EPA of Series GKOALG6 Area Light


							
	1	2 @ 90°	2 @ 120°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
100W/150W/200W	0.4418	0.7145	0.8813	0.8836	1.0548	1.0135	1.0548
240W/300W/350W	0.5614	0.8471	1.1050	1.1228	1.2940	1.2503	1.2940

## Electrical Data of Series GKOALG6 Area Light

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	2600	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
		100	347	0.29
		100	480	0.21
1	3850	150	120	1.25
		150	208	0.72
		150	240	0.63
		150	277	0.54
		150	347	0.43
		150	480	0.31
1	5100	200	120	1.67
		200	208	0.96
		200	240	0.83
		200	277	0.72
		200	347	0.58
		200	480	0.42
1	6300	240	120	2.00
		240	208	1.15
		240	240	1.00
		240	277	0.87
		240	347	0.69
		240	480	0.50
1	6000	300	120	2.50
		300	208	1.44
		300	240	1.25
		300	277	1.08
		300	347	0.86
		300	480	0.63
1	5800	350	120	2.92
		350	208	1.68
		350	240	1.46
		350	277	1.26
		350	347	1.01
		350	480	0.73


# Dimensions & Weight

**GKOAL01: 70W (Slipfitter Mount)**




Weight  
70W: 11lb.  
105W: 11.40lb.

**GKOAL01: 70W (Pole Mount)**




Weight  
70W: 11.8lb.  
105W: 11.98lb.

**GKOAL01: 70W (Wall Mount)**




Weight  
70W: 13.45lb.  
105W: 13.84lb.

**GKOALG6: 100W/150W/200W (Slipfitter Mount)**

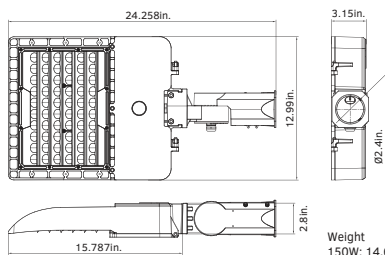


Weight  
100W: 14.638lb.  
150W: 16.308lb.  
200W: 16.526lb.

**GKOALG6: 100W/150W/200W (Pole Mount)**

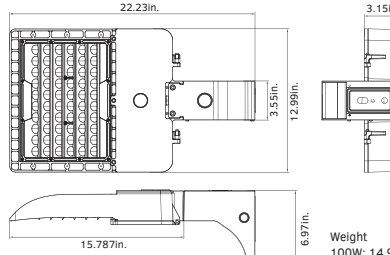


Weight  
100W: 14.912lb.  
150W: 15.783lb.  
200W: 16.001lb.

**GKOALG6: 100W/150W/200W (Wall Mount)**

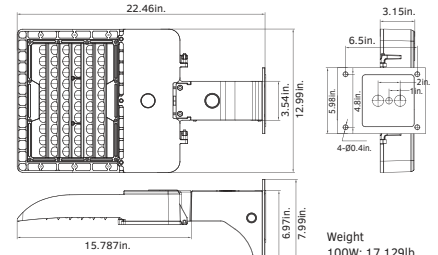


Weight  
100W: 17.129lb.  
150W: 18.341lb.  
200W: 18.559lb.

**GKOALG6: 240W/300W/350W (Slipfitter Mount)**

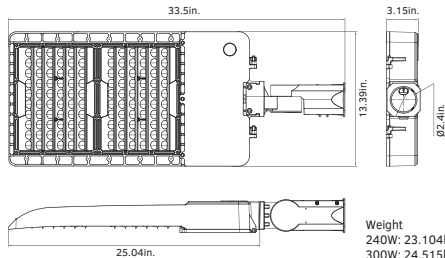


Weight  
240W: 23.104lb.  
300W: 24.515lb.  
350W: 24.515lb.

**GKOALG6: 240W/300W/350W (Pole Mount)**

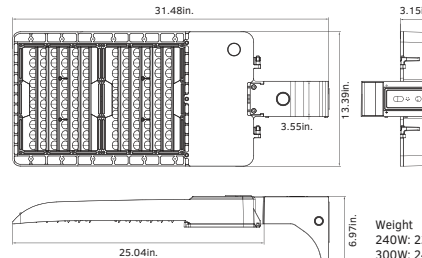

Weight  
240W: 22.686lb.  
300W: 24.097lb.  
350W: 24.097lb.

**GKOALG6: 240W/300W/350W (Wall Mount)**

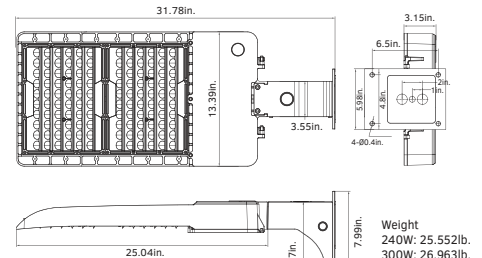


Weight  
240W: 25.552lb.  
300W: 26.963lb.  
350W: 26.963lb.


# Lighting Distribution

GKOLED offers a complete set of optical systems to meet every site lighting requirement. These systems provide remarkable flexibility in precisely matching light distribution patterns to specific site requirements.


Type 3 optics produce an asymmetrical pattern that directs the majority of the light forward and equally on both sides of the luminaire. In a back-to-back configuration, it creates a rectangular pattern which can extend pole spacings.

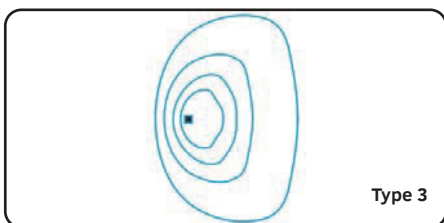

Type 4 is suitable for applications where light is primarily required forward with minimal backlight. Typical installations include perimeter poles.

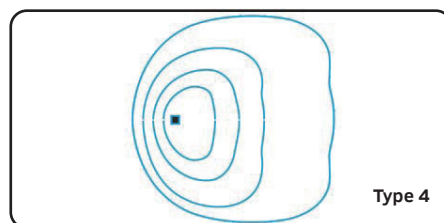

Type 5 optics produce a symmetrical square distribution pattern that distributes light equally on all sides of the luminaire. Type 5 luminaires are universal for most area lighting applications.

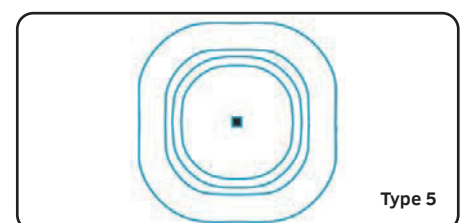


# Mounting Information

## Mounting Options



**Pole Mount (4" and 5" Square and Round poles)**  
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.

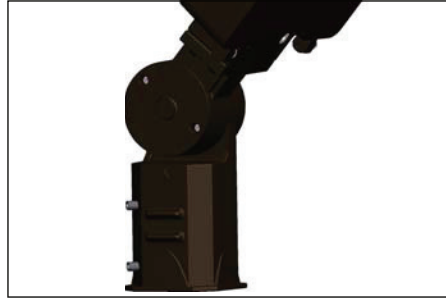

**Slipfitter Mount**  
An optional cast aluminum mast arm adaptor secures fixture head to nominal 2" (2-3/8" O.D. pipe size) horizontal steel tenon arm.










**Wall Mount**  
Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting.

## Mounting Accessories

ROUND POLE CONNECTING PLATE • For square mount to be fixed to a round pole		
<p>Square pole Luminaire</p>	<p>Round pole 5" O.D. Connecting piece Luminaire</p>	<p><b>Drilling Template</b></p>

## Additional Accessories

POLE BRACKET • For mounting one fixture on an existing pole			
	<p>4" Square Pole Mount with 2-3/8" O.D. Tenon NO. 4SQ-SP-D FINISH: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p>4" Round Pole Mount with 2-3/8" O.D. Tenon NO. 4SQR-SP-D FINISH: Dark Bronze USE: For use with round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>5" Square Pole Mount with 2-3/8" O.D. Tenon NO. 5SQ-SP-D FINISH: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p>5" Round Pole Mount with 2-3/8" O.D. Tenon NO. 5SQR-SP-D FINISH: Dark Bronze USE: For use with round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>2-3/8" O.D. Tenon Mount Adaptor for Yoke Fixtures NO. SP-TR-D FINISH: Dark Bronze USE: The 2-3/8" O.D. Tenon Mount Adaptor for Yoke Fixtures is designed to mount GKOLED light fixtures that are equipped with a yoke mount onto a 2-3/8" O.D. tenon. It may be utilized with the GKOLED flood light series of light fixture.</p>		<p>Angle Adjustment Adaptor NO. SQA-ALDA FINISH: Dark Bronze USE: This durable bracket is engineered as a versatile mounting option. Made from die-cast aluminum, it allows for optimal positioning of the light fixture to maximize the light effectiveness both vertically and horizontally.</p>

WALL BRACKET • Attaches to any flat surface • Provides wiring access		MID-POLE TENON BRACKET	
	<p>90° Wall Mount Bracket with 2-3/8" O.D. Tenon NO. WM-SP-D FINISH: Dark Bronze USE: The 90° Wall Mount Bracket with 2-3/8" Tenon attaches a GKOLED flood light to almost any surface, wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>		<p>2-3/8" O.D. Horizontal Tenon Mid-Pole Bracket NO. SQ-SP-D FINISH: Dark Bronze USE: The 2-3/8" O.D. Horizontal Tenon Mid-Pole Bracket is designed to mount a light fixture that is equipped with an adjustable slipfitter onto a 2-3/8" O.D. horizontal tenon.</p>
ROUND EXTERNAL MOUNT HORIZONTAL TENON • To mount 2, 3, or 4 fixtures on an existing pole			
	<p>Double 90° Horizontal Tenon Adaptor NO. R60-SP2-90-D FINISH: Dark Bronze USE: The Bracket is designed to mount over a 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>		<p>Triple 120° Horizontal Tenon Adaptor NO. R60-SP3-120-D FINISH: Dark Bronze USE: The Bracket is designed to mount over a 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
	<p>Double 180° Horizontal Tenon Adaptor NO. R60-SP2-180-D FINISH: Dark Bronze USE: The Bracket is designed to mount over a 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>		<p>Quad 90° Horizontal Tenon Adaptor NO. R60-SP4-90-D FINISH: Dark Bronze USE: The Bracket is designed to mount over a 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
	<p>Triple 90° Horizontal Tenon Adaptor NO. R60-SP3-90-D FINISH: Dark Bronze USE: The Bracket is designed to mount over a 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>		

## Ordering Information

Area Light Series GKOAL01								Example: GKOAL70W27V50KDPOSQT3S	
Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Optional)	Mounting	Photometry	Surge Protection (Optional)	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
GKOAL	70W	27V 120-277V	40K 4000K 50K 5000K	D Dark Bronze B Black W White SG Silver Gray	P0 120-277V Photocell P3 347V Photocell P4 480V Photocell Blank Without Photocell	SQ Square Pole Mount SP Slipfitter Mount WM Wall Mount	T3 Type III Photometry T4 Type IV Photometry T5 Type V Photometry	S Surge protection	
	75W	48V 347-480V						Blank No Surge protection	

Area Light Series GKOALG6								Example: GKOALG6300W27V50KDPOSPT3	
Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Optional)	Mounting	Photometry		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
GKOALG6	100W	27V 120-277V	40K 4000K 50K 5000K	D Dark Bronze B Black W White SG Silver Gray	P0 120-277V Photocell P3 347V Photocell P4 480V Photocell Blank Without Photocell	SQ Square Pole Mount SP Slipfitter Mount WM Wall Mount	T3 Type III Photometry T4 Type IV Photometry T5 Type V Photometry		
	150W	48V 347-480V							
	200W								
	240W								
	300W								
	350W								

Note: Not all product variations listed on this page are DLC qualified. Visit [www.designlights.org](http://www.designlights.org) to confirm qualification.