

⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- Accumulation of water and debris on the fixture lens can result in water damage or overheating. To avoid this, make sure the fixture is installed at a minimum horizontal angle of 15°.
- Suitable for operation in ambient temperatures ranging from -40°F to 113°F.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Min 167°F supply conductors.
- This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor.


Installation Guide

Installation and service of luminaires should be performed by a qualified licensed electrician.

Slipfitter Mount (Figure 1)

1. Make wiring connections as per the wiring diagram below.
2. Loosen the screws holding the cover plate in place and remove the cover plate. Loosen the center bolt to adjust the bracket to the desired angle, then retighten the center bolt to lock the fixture at the desired angle. Replace the cover plate and retighten the screws.
3. Install the slipfitter bracket on the pole and fix it in place by tightening the screws on the side of the bracket.


Figure 1

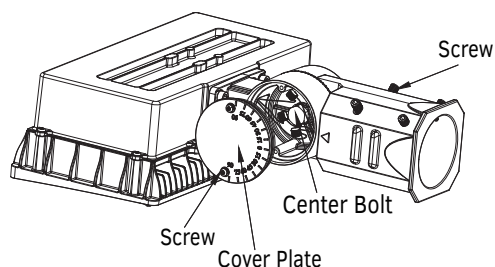

Yoke Mount (Figure 2)

1. Mount fixture onto the installation surface using the hole pattern provided on the yoke bracket.
2. Make wiring connections as per the wiring diagram below.
3. To aim the fixture, loosen the center bolts and set screws on the sides of the yoke mount and rotate the fixture to the desired tilt angle, then retighten the center bolts and set screws.

Figure 2

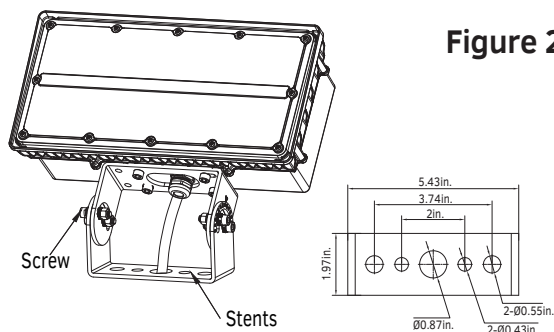

Wiring Diagram


Black	○	Line
White	○	Neutral
Green	○	Ground
Purple	○	DIM+
Gray	○	DIM-

NOTE: Dimming wires may not be accessible on some models.

Photocell Installation

Universal voltage driver permits operation at 120V to 277VAC, 60Hz, except fixtures factory ordered with a 120V photocell (P1), 277V photocell (P2), or 120-277V photocell (P0).

1. Install photocell and wire as per diagram.
2. Use photocell rated for your supply voltage.

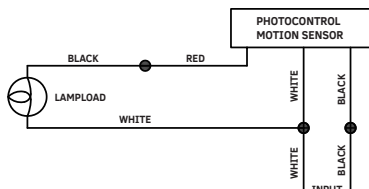

Troubleshooting

1. Check that the line voltage at the fixture is correct. Refer to the wiring diagram.
2. Ensure the fixture is grounded properly.
3. Be sure the photocell, if used, is functioning properly.