



15W / 17W / 25W

## Product Overview

High performing GKOWM01 Wall Mounts feature a compact and sleek design that is perfect for providing security lighting in entryways, perimeters, and other outdoor areas. DLC Qualified with a superb efficacy of up to 121 lm/W, they are the perfect one-to-one replacement for incandescent fixtures. They are also UL Wet Location Listed, making them ideal for outdoor applications.



## Key Features

### CONSTRUCTION:

- Rugged die-cast aluminum housing.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.
- Housing is completely sealed against moisture and environmental contaminants.

### FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

### OPTICS:

- Light engines are available in standard 3000K, 4000K and 5000K configurations.
- Light output of up to 2,700 Lumens, replaces up to a 50W MH fixture.
- Impact and UV-resistant clear or frosted polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

### ELECTRICAL:

- Universal 120-277V input voltage.
- THD: ≤20%, Power Factor: ≥90%.

### CONTROLS:

- Optional integrated button photocell for further energy savings - P0 120-277V.

### INSTALLATION:

- Wall mount or junction box mount options are available.
- Easy installation with integrated level bubble.

### WARRANTY:

- 5 Year Limited Warranty.

### LISTINGS:

- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 122°F (-40°C to 50°C).

# Performance Data


## Lumen Output

System Watts	Lens	3000K(70CRI)		4000K(70CRI)		5000K(70CRI)	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
15W	Clear	1600lm	107lm/W	1700lm	113lm/W	1750lm	117lm/W
15W	Frosted	1760lm	117lm/W	1800lm	120lm/W	1820lm	121lm/W
17W	Clear	1800lm	106lm/W	1900lm	112lm/W	1950lm	115lm/W
17W	Frosted	1900lm	112lm/W	2000lm	118lm/W	2020lm	119lm/W
25W	Clear	2500lm	100lm/W	2550lm	102lm/W	2600lm	104lm/W
25W	Frosted	2550lm	102lm/W	2600lm	104lm/W	2700lm	108 lm/W

## Electrical Data


Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	250	17	120	0.14
		17	208	0.08
		17	240	0.07
		17	277	0.06
1	430	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

## Dimensions & Weight

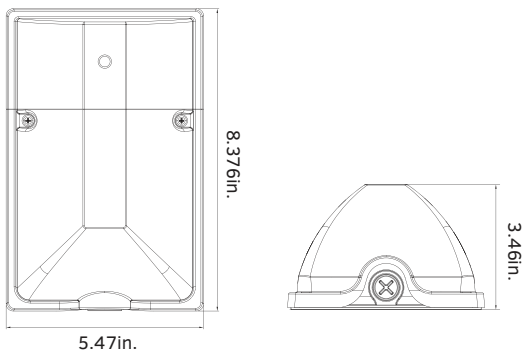

Weight:  
 15W: 1.77lb.  
 17W: 1.77lb.  
 25W: 1.85lb.

## Light Distribution

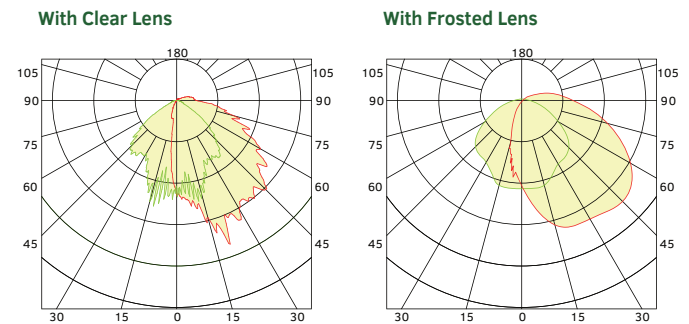

# Ordering Information

Wall Mount Series GKOWM01				Example: GKOWM15W27V50KDPOF			
Fixture Type <input type="text"/>	Wattage <input type="text"/>	Voltage <input type="text"/>	CCT <input type="text"/>	Finish <input type="text"/>	Photocell <input type="text"/>	Lens <input type="text"/>	
<b>GKOWM</b>	<b>15W</b> <b>17W</b> <b>25W</b>	<b>27V</b> 120-277V	<b>30K</b> 3000K <b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>PO</b> 120-277V Photocell <b>Blank</b> Without Photocell	<b>F</b> Frosted Lens <b>Blank</b> Clear Lens	