LED VAPOR TIGHT LINEAR

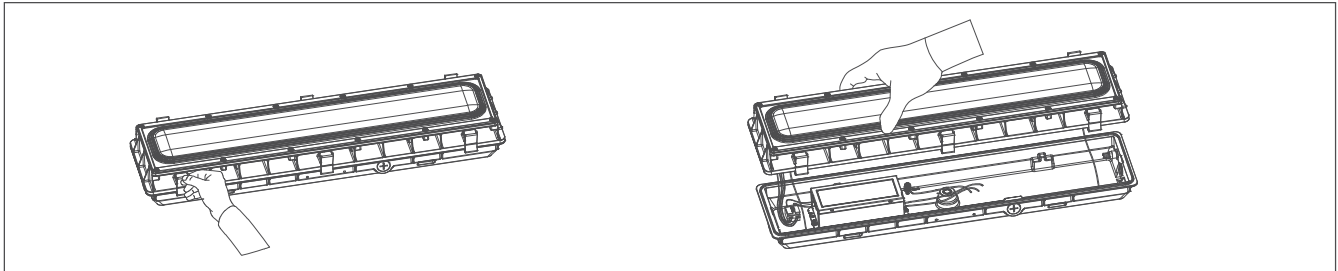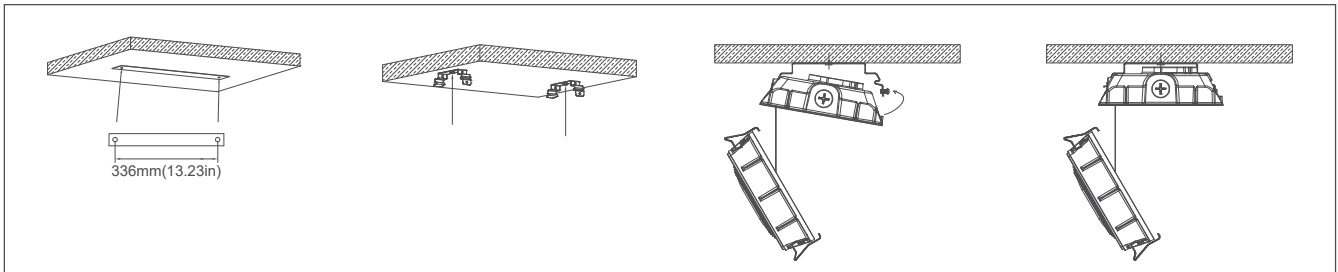## ⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
4. Do not touch the fixture while it is in service.
5. Operating temperature is -40℃ to 45℃.
6. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

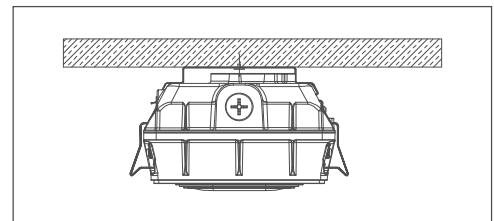## Installation and instructions

• Surface mount (default setting)

1. Unfasten the latches and separate the led module and the power housing.
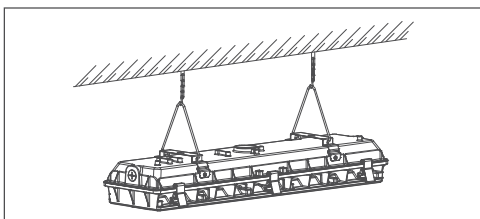

336mm(13.23in)

2. Use the leveling ruler to settle the screws hole then secure the housing to the ceiling with screws.

3. Connect wires (voltage to black, white to common, and green to ground);
   Secure the led module to the housing and fasten six latches, ensuring water does not enter fixture.

• V-Hook Mounting

1. Put the mounting bracket on the housing, tighten it with screws.
2. Fasten the V hook hang it with the chain.

WIRING DIAGRAM

For 1-10V dimming version,
please check wiring diagram below.

Black	Line
White	Neutral
Green/Yellow Green	Ground
Purple	DIM+
Gray	DIM-

GKO-V1-0924-US