


2' X 2'
1' X 4'
2' X 4'

Product Overview

Series GKOTRG1 LED Troffer fixtures are an energy-efficient lighting solution for commercial or institutional settings with recessed or suspended grid ceilings and are available in 3 popular sizes.



Key Features

CONSTRUCTION:

- Stamped sheet metal housing offers excellent heat dissipation.

FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Light engines are available in standard 3500K, 4000K, and 5000K configurations.
- A range of lumen options available from 2,600 to 5,850 Lumens.
- Impact and UV-resistant frosted polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

ELECTRICAL:

- Universal 120-277V input voltage.
- Auxilliary 12V driver optional.
- Standard 1KV surge protection.
- 0-10V dimming driver(s) standard.
- Flicker-free driver with $\leq 10\%$ stroboscopic index prevents flicker during the lighting and dimming process.
- THD: $\leq 20\%$, Power Factor: $\geq 90\%$.

CONTROLS:

- Power and CCT may be adjusted during installation using switches on the side of the driver housing. 3500K, 4000K, and 5000K CCT options are available.
- Optional plug & play multi-level motion sensor - ANT-15P.
- Emergency battery backup model provides up to 90 minutes of operation at a minimum of 1000lm during outages. During an outage, CCT defaults to 5000K. During regular operation, CCT is available in 3500K, 4000K, and 5000K.
- Bluetooth networked controls that are DLC NLC qualified, utilizing a Bluetooth SIG mesh network operated with iOS, Android, and web.

INSTALLATION:

- Suitable for recessed installation.
- Surface mounting with optional surface mount kit (by special order only).

WARRANTY:

- 5 Year Limited Warranty.

LISTINGS:

- DesignLights Consortium® (DLC) qualified.
- UL Damp Location Listed.
- Rated for ambient operating temperature -4°F to 122°F (-20°C to 50°C).

Performance Data

1x4 30W Lumen Output

System Watts	CRI	Size	3500K		4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
20W	84	1x4	2600lm	130lm/W	2600lm	130lm/W	2600lm	130lm/W
25W	84	1x4	3250lm	130lm/W	3250lm	130lm/W	3250lm	130lm/W
30W	82	1x4	3900lm	130lm/W	3900lm	130lm/W	3900lm	130lm/W

2x2 30W Lumen Output

System Watts	CRI	Size	3500K(80CRI)		4000K(80CRI)		5000K(80CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
20W	83	2x2	2800lm	140lm/W	2800lm	140lm/W	2800lm	140lm/W
25W	83	2x2	3375lm	135lm/W	3375lm	135lm/W	3375lm	135lm/W
30W	83	2x2	3900lm	130lm/W	3900lm	130lm/W	3900lm	130lm/W

2x2 40W Lumen Output

System Watts	CRI	Size	3500K(80CRI)		4000K(80CRI)		5000K(80CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
30W	80	2x2	3900lm	130lm/W	3900lm	130lm/W	3900lm	130lm/W
35W	82	2x2	4620lm	132lm/W	4620lm	132lm/W	4620lm	132lm/W
40W	82	2x2	5200lm	130lm/W	5200lm	130lm/W	5200lm	130lm/W

2x4 35W Lumen Output


System Watts	CRI	Size	3500K(80CRI)		4000K(80CRI)		5000K(80CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
25W	82	2x4	3450lm	138lm/W	3450lm	138lm/W	3450lm	138lm/W
30W	82	2x4	4020lm	134lm/W	4020lm	134lm/W	4020lm	134lm/W
35W	82	2x4	4550lm	130lm/W	4550lm	130lm/W	4550lm	130lm/W

2x4 45W Lumen Output

System Watts	CRI	Size	3500K(80CRI)		4000K(80CRI)		5000K(80CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
34W	83	2x4	4760lm	140lm/W	4760lm	140lm/W	4760lm	140lm/W
38W	83	2x4	5130lm	135lm/W	5130lm	135lm/W	5130lm	135lm/W
45W	83	2x4	5850lm	130lm/W	5850lm	130lm/W	5850lm	130lm/W


Dimensions & Weight

2x4

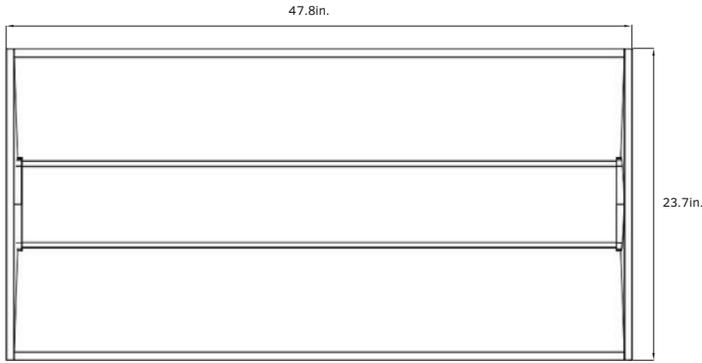


Weight
Tunable: 10.81lb.
Emergency Battery Backup Model: 11.81lb.

2x2

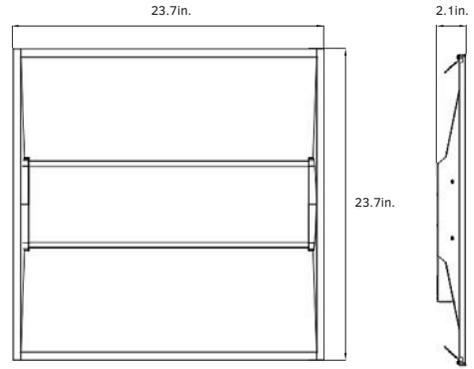

Weight
Tunable: 6.28lb.
Emergency Battery Backup Model: 7.28lb.

1x4

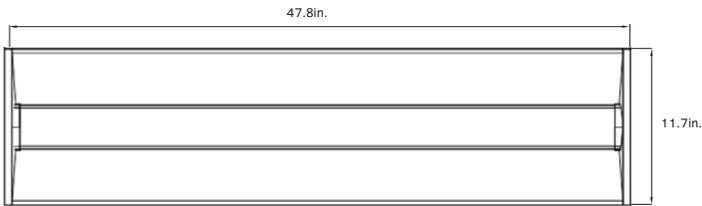

Weight
Tunable: 7.39lb.
Emergency Battery Backup Model: 8.39lb.

Accessories



MULTI-LEVEL MOTION SENSOR
Optional plug & play multi-level motion sensor detects occupancy in an area for additional energy savings.



EMERGENCY BATTERY BACKUP MODEL
Emergency battery backup model provides up to 90 minutes of operation during power outages. During an outage, CCT defaults to 5000K.

Mounting Options



RECESSED MOUNTING (INCLUDED)
LED Troffers are suitable for standard recessed mounting in a grid ceiling, by default.



SURFACE MOUNTING (OPTIONAL)
Special order surface mounting kit allows for mounting without a ceiling grid (sold separately).

Ordering Information

LED Troffer GKOTRG1				Example: GKOTRG122D30W27VDDK			
Fixture Type <input type="text"/>	Size <input type="text"/>	Series <input type="text"/>	Wattage <input type="text"/>	Voltage <input type="text"/>	CCT <input type="text"/>	Sensor (Optional) <input type="text"/>	Battery Backup (Optional) <input type="text"/>
GKOTRG1	14 1x4	D Series D	30W 30W / 25W / 20W	27V 120-277V	DDK Power & CCT Tunable	M With Sensor	B With Emergency Battery
	22 2x2	D Series D	30W 30W / 25W / 20W 40W 40W / 35W / 30W			Blank Without Sensor	Blank Without Emergency Battery
	24 2x4	D Series D	30W 35W / 30W / 25W 45W 45W / 38W / 34W				