


**WARNING**

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaire and wait until the fixture cools down.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.
6. Please read the label information carefully to get proper input voltage for this fixture.
7. This luminaire is designed to operate in ambient temperatures ranging from -40°F to 104°F.
8. This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor.



### Junction Box Mounting

1. Loosen the two set screws and remove the metal mounting plate.
2. Install the EVA gasket onto the back of the metal mounting plate, making sure to align the arrows on the gasket and the mounting plate.
3. Pull supply wires through the hole in the back of the housing and secure the housing to the junction box with two mounting screws (not included).
4. Complete wiring (Black for Line, White for Neutral and bare wire for Ground).
5. Reattach the fixture to the metal mounting plate with the set screws.

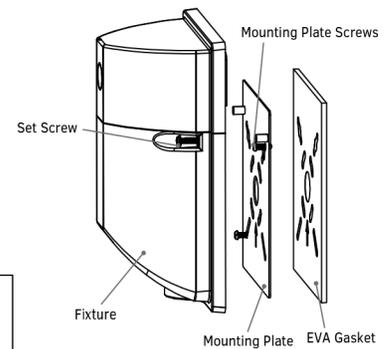

### 1/2" Conduit Mounting

1. Loosen the two set screws and remove the metal mounting plate.
2. Install the EVA gasket onto the back of the metal mounting plate, making sure to align the arrows on the gasket and the mounting plate.
3. Secure the metal template to the wall with screws (not included).
4. Remove the knockout at the bottom of the fixture with appropriate tools and thread 1/2" conduit into the 1/2" hole on the bottom of the fixture.
5. Complete wiring (Black for Line, White for Neutral and bare wire for Ground).
6. Reattach the fixture to the metal mounting plate with the set screws.

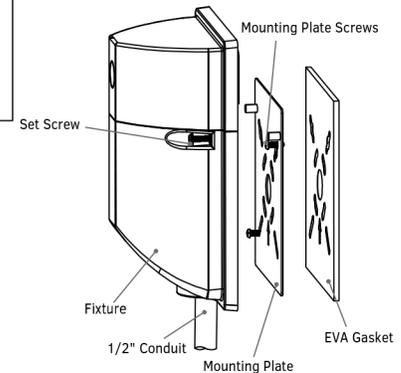


**Note:** To ensure a waterproof seal, apply weatherproof silicone sealant (not included) around the edge of the wall mounting box and/or junction box. This is especially important with an uneven wall surface. Silicone all plugs and unused conduit entries.



### Photocell Installation

Install photocell and wire as per diagram. Use a photocell rated for your supply voltage.

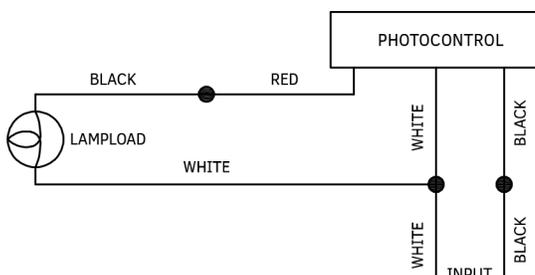

### Troubleshooting

1. Check that the line voltage at the fixture is correct. Refer to wiring directions.
2. Check that the fixture is grounded properly.
3. Be sure the photocell, if used, is functioning properly.