

WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- Accumulation of water and debris on the fixture lens can result in water damage or overheating. To avoid this, make sure the fixture is installed at a minimum horizontal angle of 15°.
- Suitable for operation in ambient temperatures ranging from -40°F to 113°F.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Min 167°F supply conductors.
- Not suitable for mounting over 4ft off the ground.

Installation Guide

1/2" NPS Knuckle Mount (Figure 1) Optional Ground Stake Mount Available (Sold Separately)

1. Mount the fixture to any metal 1/2" NPS threaded mount (not included). Please make sure to mount the fixture before making wiring connections.
2. Route electrical threads through the mounting hole.
3. Seal the knuckle threads with sealing compound (not included). Tighten the lock nut to ensure the fixture is securely mounted.
4. Make wiring connections as per the wiring diagram below.
5. To adjust the angle of the fixture, loosen the pivot screw, then use visual angle indicators to set the desired angle. Retighten the pivot screw to lock the fixture at the desired angle.

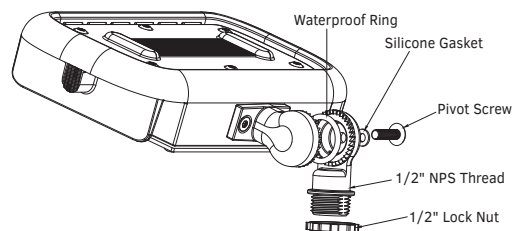


Figure 1

Trunnion Mount (Figure 2)

1. Attach the trunnion mount to the desired surface using screws.
2. Make wiring connections as per the wiring diagram below. Make sure that wire connections are secure and that wire connections between the fixture and utility power are in a waterproof location.
3. To adjust the angle of the fixture, loosen the pivot screws on the sides of the fixture, then use visual angle indicators to set the desired angle. Retighten the pivot screws to lock the fixture at the desired angle.


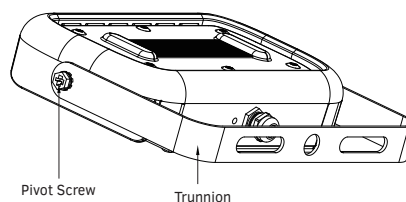


Figure 2

Wiring Diagram



Troubleshooting

1. Check that the line voltage at the fixture is correct. Refer to the wiring diagram.
2. Ensure the fixture is grounded properly.