

WARNING
PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- Accumulation of water and debris on the fixture lens can result in water damage or overheating. To avoid this, make sure the fixture is installed at a minimum horizontal angle of 15°.
- Suitable for operation in ambient temperatures ranging from -40°F to 113°F.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Min 167°F supply conductors.
- Not suitable for mounting over 4ft off the ground.
- This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

Installation Guide

Installation and service of luminaires should be performed by a qualified licensed electrician.

1/2" NPS Knuckle Mount (Figure 1)

1. Thread the knuckle into the 1/2" NPS hole and secure it with the 1/2" lock nut.
2. Make electrical connections from the supply ground (L/N) lead to the fixture ground (L/N) lead respectively, making sure to follow the National Electrical Code and all applicable local codes and ordinances. While making electrical connections, make sure water does not enter fixture through the 1/2" fitter.
3. To aim the fixture, loosen the screw on the knuckle of the fitter and rotate the fixture to the desired tilt angle, then retighten the screw.

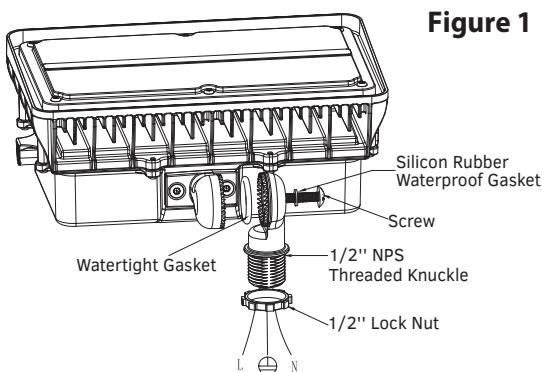


Figure 1

Trunnion Mount (Figure 2)

1. Mount fixture onto the installation surface using the hole pattern provided on the trunnion bracket.
2. Make electrical connections from the supply ground (L/N) lead to the fixture ground (L/N) lead respectively, making sure to follow the National Electrical Code and all applicable local codes and ordinances. While making electrical connections, make sure water does not enter fixture through the 1/2" fitter.
3. To aim the fixture, loosen the screws on the sides of the trunnion and rotate the fixture to the desired tilt angle, then retighten the screws.


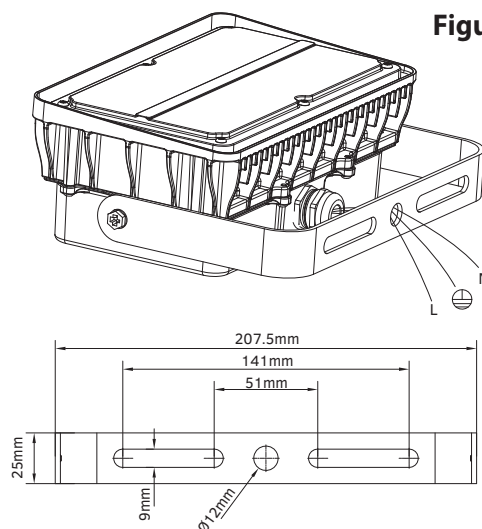


Figure 2

Wiring Diagram

Black	○	Line
White	○	Neutral
Green	○	Ground
Purple	○	DIM+
Gray	○	DIM-

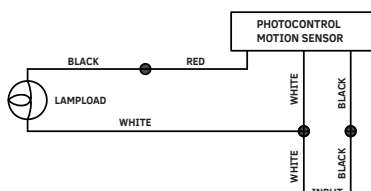

NOTE: Dimming wires are not accessible.