



SLIM FULL CUTOFF WALL PACK

SERIES GKOWPG10



Product Overview

The Power & CCT Selectable GKOWPG10 Slim Full-Cutoff Wall Pack features a low profile that allows for 0° to 90° tilt adjustments, for precise illumination for perimeter, entrance, stairway, and security lighting. The full cutoff design minimizes vertical light to reduce glare and light pollution.

Key Features

CONSTRUCTION:

- Rugged die-cast aluminum housing.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.
- Housing is completely sealed against moisture and environmental contaminants.

FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Full cutoff design minimizes glare and light pollution.
- Light engines are available in selectable 3000K, 4000K, and 5000K configurations.
- A range of lumen options available from 2,600 to 12,200 Lumens, replaces up to 250W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

WARRANTY:

- 5 Year Limited Warranty.

ELECTRICAL:

- Universal 120-277V input voltage.
- 2KV surge protection for 40W, 6KV surge protection for 80W.
- 0-10V dimming driver(s) optional.
- THD: ≤20%, Power Factor: ≥90%.

CONTROLS:

- Power & CCT adjustment controls are included, enabling power selection from 100%, 80%, 60%, or 40%, and CCT selection from 3000K, 4000K, and 5000K.
- Included integrated photocell for additional energy savings - PO 120-277V. Cover photocell with included silicone cap to disable photocell function.

INSTALLATION:

- Wall mount or junction box mount options are available.
- Adjustable mount allows for 0° to 90° tilt adjustments.

LISTINGS:


- DesignLights Consortium® (DLC) Premium qualified (available upon request).
- UL certified for wet locations.
- Rated for ambient operating temperature -40°F to 104°F (-40°C to 40°C).



100 E. Crossroads Pkwy. Ste. C
Bolingbrook, IL 60440
Phone: 630-793-9449
Web: www.gkoled.com

Power & CCT Adjustment Controls

Included On All Models

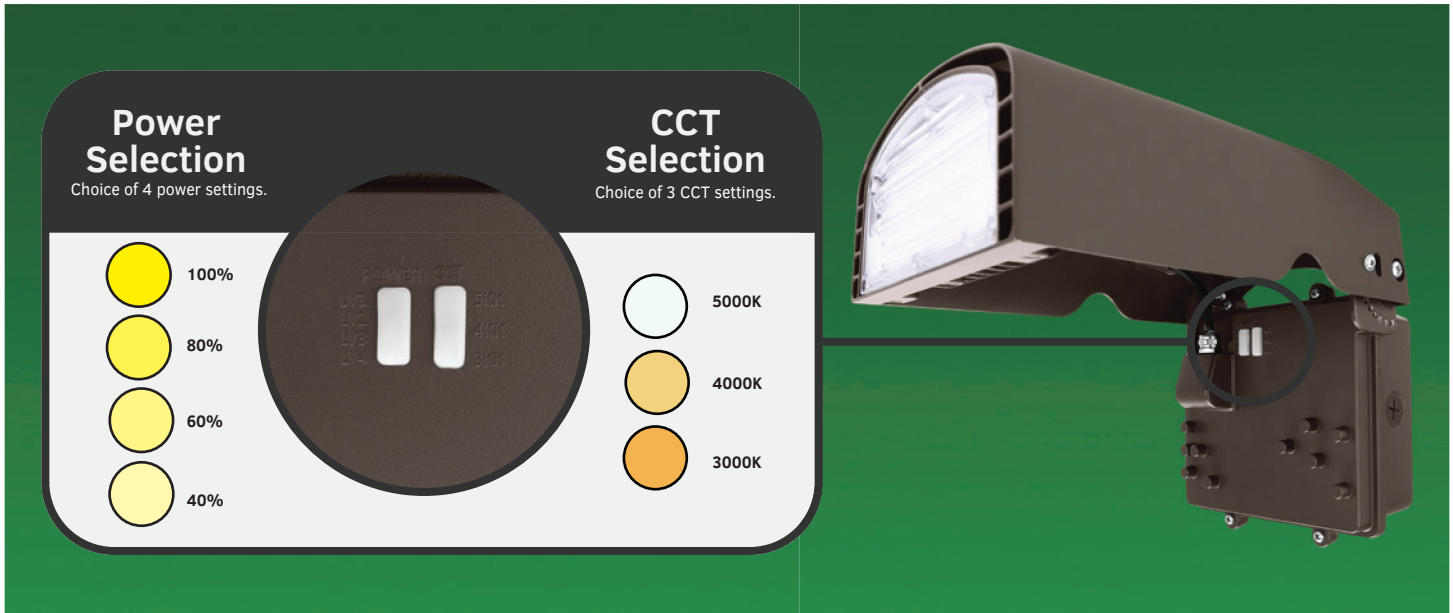

Performance Data

40W Lumen Output

Setting	System Watts	CRI	Lumens (3000K)	Efficacy (3000K)	Lumens (4000K)	Efficacy (4000K)	Lumens (5000K)	Efficacy (5000K)
100%	40W	70	5600lm	140lm/W	6200lm	155lm/W	5800lm	145lm/W
80%	32W	70	4700lm	147lm/W	5100lm	159lm/W	4800lm	150lm/W
60%	24W	70	3700lm	154lm/W	3950lm	165lm/W	3800lm	158lm/W
40%	16W	70	2600lm	163lm/W	2800lm	175lm/W	2650lm	166lm/W

80W Lumen Output

Setting	System Watts	CRI	Lumens (3000K)	Efficacy (3000K)	Lumens (4000K)	Efficacy (4000K)	Lumens (5000K)	Efficacy (5000K)
100%	80W	70	11200lm	140lm/W	12200lm	153lm/W	11500lm	144lm/W
80%	64W	70	9300lm	145lm/W	10100lm	158lm/W	9600lm	150lm/W
60%	48W	70	7300lm	152lm/W	7800lm	163lm/W	7500lm	156lm/W
40%	32W	70	5050lm	158lm/W	5400lm	169lm/W	5200lm	163lm/W

Electrical Data

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	640	40	120	0.33
		40	208	0.19
		40	240	0.17
		40	277	0.14
1	2120	80	120	0.67
		80	208	0.38
		80	240	0.33
		80	277	0.29

Accessories






INTEGRATED PHOTOCELL

Included integrated photocell adds dusk to dawn function for additional energy savings. Cover photocell with included silicone cap to disable photocell function.




Dimensions & Weight

GKOWPG10: 40W



Weight: 40W: 3.968lb.

GKOWPG10: 80W



Weight: 80W: 7.804lb.

Ordering Information

Slim Full Cutoff Wall Pack Series GKOWPG10

Example: GKOWPG1040W27VDDKYYYYY

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell	Adjustment Dial	Dimmable	Internal Code
GKOWPG10	40W 80W	27V 120-277V	DDK Power & CCT Selectable	D Dark Bronze* B Black W White	P 120-277V Photocell Blank Without Photocell	AD Adjustment Dial	D 0-10V Dimmable	Blank Alphanumeric

NOTE: *Default finish is dark bronze. All other finishes are special order only.