



ARCHITECTURAL LINEAR

SERIES GKOARLG1



Highlights

- Premium end-caps made from die-cast aluminum
- Superior gap control with premium bracket connection system
- Field selectable Power, CCT, Up/Downlight options

PENDING



Product Overview

Series GKOARLG1 Architectural Linear Lights are a linear lighting solution with a variety of length, connection, and mounting options for an endless variety of lighting designs. All models are Power, CCT, and Up/Downlight Selectable with 3 power options, 5 CCT options, and 5 uplight/downlight configurations.

Key Features

CONSTRUCTION:

- Durable aluminum extrusion housing.
- Premium die-cast aluminum end caps.
- The diffuser and end caps overlap to eliminate gaps and conceal the LED chips.
- Available in 2', 4', and 8' in a standard linear or custom configuration with straight or illuminated L, X, T, Y, or V connectors (field-installed, Y and V special order). See electrical section for information on maximum connection lengths.

FINISH:

- Strong, durable black or white powder coat finish protects against wear and damage.

OPTICS:

- Light engines are available in 2700K, 3000K, 3500K, 4000K and 5000K.
- Preinstalled PMMA LED uplighting module for bidirectional lighting.
- Choice of 5 light distribution patterns, controlled by a dip switch.
- A range of lumen options available from 1,250 to 10,800 Lumens.
- <3 SDCM color consistency with 80 CRI.
- Default high quality flat frosted polycarbonate diffuser for smooth, uniform light distribution.
- Optional louver and hexagonal louver focus the light and reduce glare (field-installed).

LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified (pending).
- UL certified for damp locations.
- Rated for ambient operating temperature -4°F to 104°F (-20°C to 40°C).

ELECTRICAL:

- Standard 120-277V input voltage. Lights can be connected up to 40' at 120V or up to 100' at 277V.
- Integrated 4KV surge protection.
- 0-10V dimming driver(s) as default.
- Default Class II drivers are durable and highly efficient.
- THD: ≤20%, Power Factor: ≥90%.

CONTROLS:

- Power & CCT adjustment controls are included, enabling power selection from 100%, 75%, or 50%, and CCT selection from 2700K, 3000K, 3500K, 4000K and 5000K.
- Optional plug & play PIR motion sensor for daylight dimming and/or occupancy detection - ANT-15P (field-installed, extended lead time).
- Special order emergency battery backup provides up to 90 minutes of operation during outages (only compatible with 4' or 8' model).
- Bluetooth NLC Listed plug & play PIR motion sensor, utilizing a Bluetooth SIG mesh network operated with iOS, Android, and web, optional for all models - ANT-15P-BLE-SR (field-installed, extended lead time).

INSTALLATION:

- Optional drywall pendant mounting kit, surface mounting kit, or wall mounting kit (field-installed).

WARRANTY:


- 5 Year Limited Warranty.



100 E. Crossroads Pkwy. Ste. C
Bolingbrook, IL 60440
Phone: 630-793-9449
Web: www.gkoled.com

Power, CCT, and Up/Downlight Adjustment Controls

Included On All Models

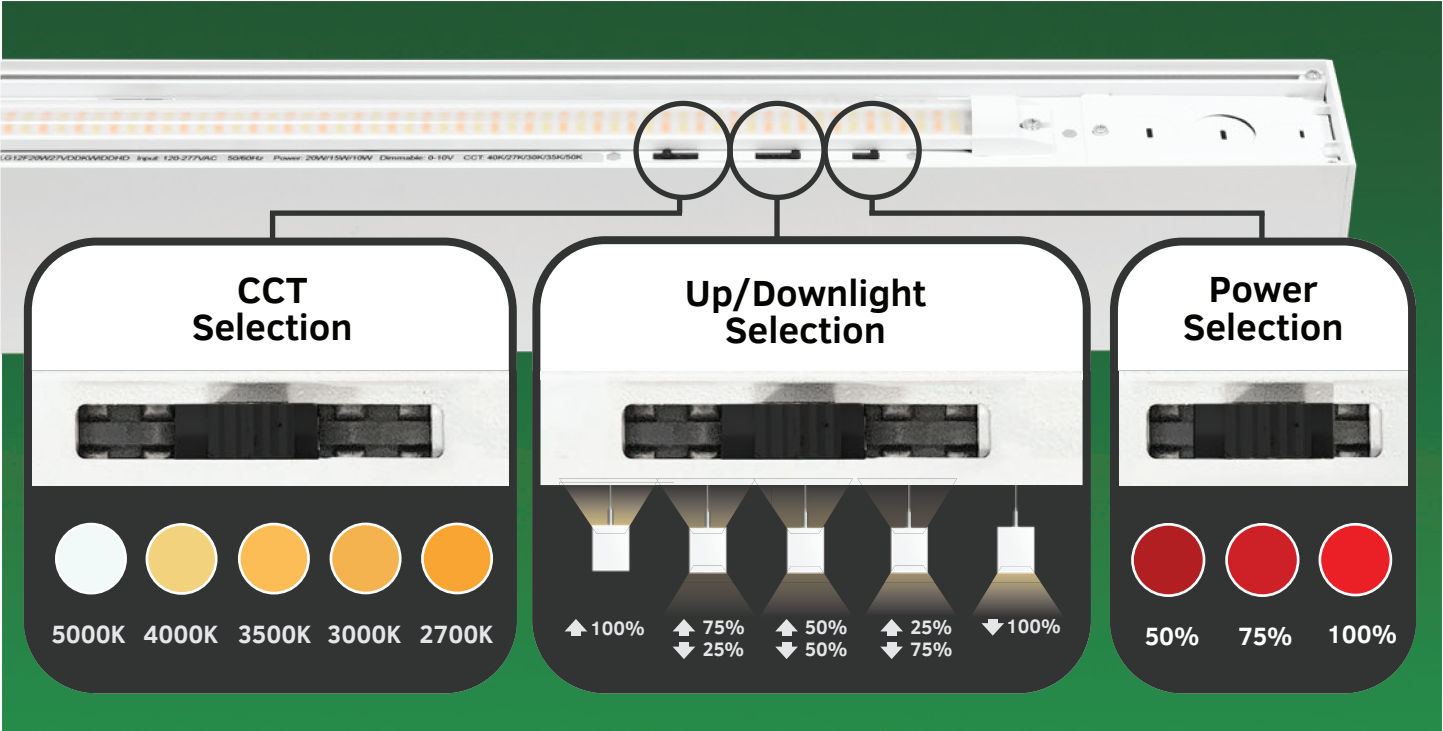

Performance Data

Size	Power Level	System Watts	2700K(80CRI)		3000K(80CRI)		3500K(80CRI)		4000K(80CRI)		5000K(80CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
2'	100%	20W	2500lm	125lm/W	2500lm	125lm/W	2700lm	135lm/W	2700lm	135lm/W	2600lm	130lm/W
	75%	15W	1875lm	125lm/W	1875lm	125lm/W	2025lm	135lm/W	2025lm	135lm/W	1950lm	130lm/W
	50%	10W	1250lm	125lm/W	1250lm	125lm/W	1350lm	135lm/W	1350lm	135lm/W	1300lm	130lm/W
4'	100%	40W	5000lm	125lm/W	5000lm	125lm/W	5400lm	135lm/W	5400lm	135lm/W	5200lm	130lm/W
	75%	30W	3750lm	125lm/W	3750lm	125lm/W	4050lm	135lm/W	4050lm	135lm/W	3900lm	130lm/W
	50%	20W	2500lm	125lm/W	2500lm	125lm/W	2700lm	135lm/W	2700lm	135lm/W	2600lm	130lm/W
8'	100%	80W	10000lm	125lm/W	10000lm	125lm/W	10800lm	135lm/W	10800lm	135lm/W	10400lm	130lm/W
	75%	60W	7500lm	125lm/W	7500lm	125lm/W	8100lm	135lm/W	8100lm	135lm/W	7800lm	130lm/W
	50%	40W	5000lm	125lm/W	5000lm	125lm/W	5400lm	135lm/W	5400lm	135lm/W	5200lm	130lm/W


NOTE: All data is for model with default frosted diffuser.

Electrical Data

Size	Number of Drivers	Driver Current (mA)	Power Level	Wattage	Current (A)			
					120V	208V	240V	277V
2'	1	430	100%	20W	0.17	0.10	0.08	0.07
			75%	15W	0.13	0.07	0.06	0.05
			50%	10W	0.08	0.05	0.04	0.04
4'	1	850	100%	40W	0.33	0.19	0.17	0.14
			75%	30W	0.25	0.14	0.13	0.11
			50%	20W	0.17	0.10	0.08	0.07

Size	Number of Drivers	Driver Current (mA)	Power Level	Wattage	Current (A)			
					120V	208V	240V	277V
8'	1	1700	100%	80W	0.67	0.38	0.33	0.29
			75%	60W	0.50	0.29	0.25	0.22
			50%	40W	0.33	0.19	0.17	0.14

Dimensions

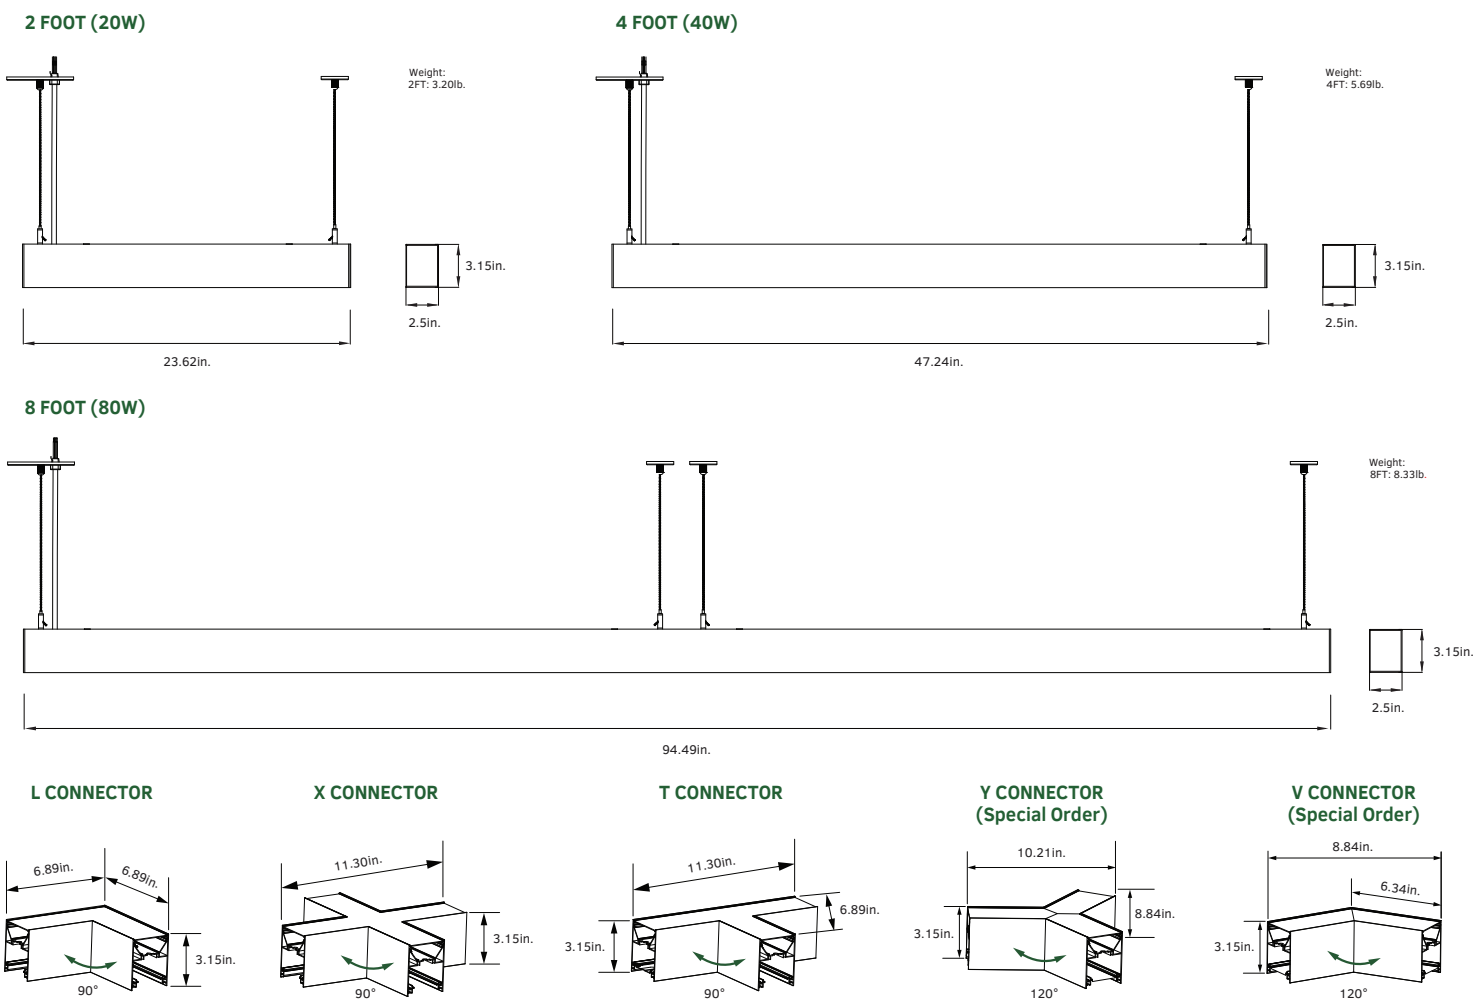

Mounting Options



DRYWALL PENDANT
Optional field-installed pendant mount allows suspended mounting from a standard drywall ceiling.



SURFACE MOUNT
Optional field-installed surface mount allows flush surface mounting to a ceiling.



WALL MOUNT
Optional field-installed wall mount allows flush surface mounting to a wall.

Connector Options


Create flush linear connections or custom lighting designs with illuminated connectors

NOTE: Lights can be connected up to 40' at 120V or up to 100' at 277V.



METAL CONNECTOR BRACKET

Used in conjunction with illuminated connectors for shapes or end to end for a flush connection between two fixtures (field-installed).

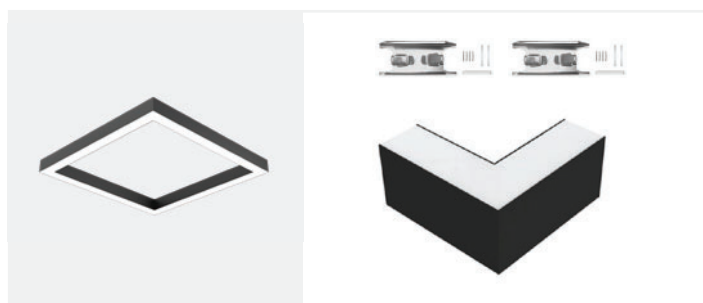

L CONNECTOR

Connects 2 lights at a 90° angle.



T CONNECTOR

Connects 3 lights at a 90° angle.



X CONNECTOR

Connects 4 lights at a 90° angle.



Y CONNECTOR


Connects 3 lights at a 120° angle. Special order only.



V CONNECTOR


Connects 2 lights at a 120° angle. Special order only.

Direct Lens Options

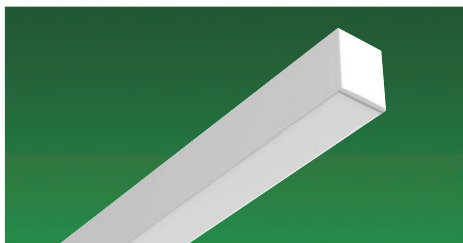


FROSTED DIFFUSER

Default frosted diffuser provides soft and comfortable light output.

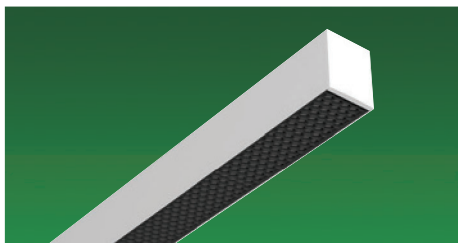

HEXAGONAL LOUVER DIFFUSER

Optional field-installed hexagonal louver diffuser provides more focused lighting with UGR<19 for reduced glare on all sides of the fixture.

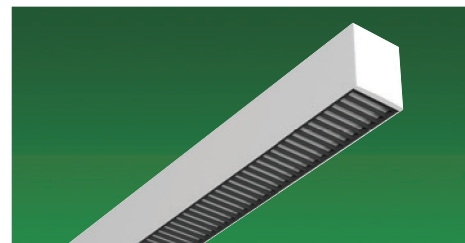

LOUVER DIFFUSER

Optional field-installed louver diffuser provides more focused lighting with reduced glare along the length of the fixture.

Accessories



PLUG & PLAY PIR MOTION SENSOR

Optional field-installed plug & play PIR multi-level motion sensor detects occupancy in an area for additional energy savings (extended lead time).



BLUETOOTH NLC LISTED PIR MOTION SENSOR

Optional field-installed plug & play Bluetooth PIR motion sensor adds Networked Control functionality utilizing a Bluetooth SIG mesh network operated with iOS, Android, and web (extended lead time).



EMERGENCY BATTERY BACKUP

Special order emergency battery backup provides up to 90 minutes of operation during power outages.

Ordering Information

Architectural Linear Light GKOARLG1										Example: GKOARGL14FT40W27VDDKYYYYYY					
Fixture Type	Size	Wattage	Voltage	CCT	Finish	Light Direction	Direct Optics	Indirect Optics	Direct/Indirect Light Output	CRI	Driver	Motion Sensor (Optional)	Battery Backup (Optional)	Mount (Optional)	Internal Code
GKOARLG1	2F 2FT	20W	27V 120-277V	DDK CCT Selectable	B Black W White	D Direct (Down Light) I Indirect & Direct (Up and Down Light)	D Diffuser L Louver HL Hex Louver	D Diffuser Blank	01 Direct 100%	H 80	D 0-10V Dimming	M With Sensor Blank Without Sensor	B With Battery' Backup Blank Without Battery Backup	DWP Drywall Pendant SM Surface Mount WM Wall Mount Blank No Mount	Blank Alphanumeric
	4F 4FT	40W							27 Indirect 25% Direct 75%						
	8F 8FT	80W							55 Indirect 50% Direct 50%						
									72 Indirect 75% Direct 25% 10 Indirect 100% Blank						

NOTE: 1. Emergency Battery Backup is special order only.