



GKOLED®

POWER & CCT SELECTABLE

CIRCULAR HIGH BAY

SERIES GKOHBG8



100W / 150W / 210W / 230W

Product Overview

Series GKOHBG8 High Bays feature a compact design with exceptional performance for efficient commercial illumination. All models include power & CCT adjustment controls, with an optional plug & play motion sensor.



Key Features

CONSTRUCTION:

- Rugged die-cast aluminum housing with integral heat sink fins.
- Housing is completely sealed against moisture and environmental contaminants.

FINISH:

- The exterior is protected by a black rust-resistant polyester powder coat finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Light engines are available in selectable 4000K and 5000K configurations.
- A range of lumen options available from 6,500 to 35,000 Lumens, replaces up to 400W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.
- Optional aluminum reflector available for different beam angles (extended lead time).

ELECTRICAL:

- Standard 120-277V input voltage.
- Standard 6KV surge protection.
- 0-10V dimming driver(s) as default for a dimming range of 100% to 10%.
- THD: ≤20%, Power Factor: ≥90%.

WARRANTY:

- 5 Year Limited Warranty.

CONTROLS:

- Power & CCT adjustment controls are included, enabling power selection from 100%, 80%, 60%, or 40%, and CCT selection from 4000K and 5000K.
- Optional plug & play PIR motion sensor - ANT-6-4T (center-mounted, field-installed). Remote required to change default motion sensor settings.
- Optional motion sensor remote control - RC-100. Required for changing the motion sensor default settings, allows the user to program multiple sensors with ease and program the sensor after the fixture is installed.
- Optional emergency battery backup provides up to 90 minutes of operation during outages (factory-installed, extended lead time).
- Bluetooth NLC Listed plug & play PIR motion sensor, utilizing a Bluetooth SIG mesh network operated with iOS, Android, and web, optional for all models - ANT-6-4T-BLE-SR (field-installed).

INSTALLATION:

- 3/4" conduit pendant mount or hook mount options are available. Hook is included, conduit is not included. Optional conduit adaptor required for pendant mounting (extended lead time).
- Surface mounting with optional Adjustable Surface Mounting Bracket allows precise aiming of the fixture to 0°, 30°, 60°, 90°, 120°, 150°, or 180° (field-installed).

LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified.
- UL certified for wet locations.
- Rated for ambient operating temperature -40°F to 122°F (-40°C to 50°C).



GKOLED®

100 E. Crossroads Pkwy. Ste. C
Bolingbrook, IL 60440
Phone: 630-793-9449
Web: www.gkoled.com

Performance Data

Lumen Output

100W						
Setting	System Watts	CRI	4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy
100%	100W	76	14500lm	145lm/W	14500lm	145lm/W
80%	80W	70	13000lm	163lm/W	13000lm	163lm/W
60%	60W	70	10000lm	167lm/W	10000lm	167lm/W
40%	40W	70	7000lm	175lm/W	6500lm	163lm/W

150W						
Setting	System Watts	CRI	4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy
100%	150W	76	22500lm	150lm/W	22500lm	150lm/W
80%	120W	70	20000lm	167lm/W	19000lm	158lm/W
60%	90W	70	15500lm	172lm/W	14600lm	162lm/W
40%	60W	70	10800lm	180lm/W	10000lm	167lm/W

210W						
Setting	System Watts	CRI	4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy
100%	210W	70	30000lm	143lm/W	30500lm	145lm/W
80%	168W	70	26500lm	158lm/W	25000lm	149lm/W
60%	126W	70	21000lm	167lm/W	20000lm	159lm/W
40%	84W	70	14500lm	173lm/W	14000lm	167lm/W



230W						
Setting	System Watts	CRI	4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy
100%	230W	76	35000lm	152lm/W	35000lm	152lm/W
80%	184W	70	30000lm	163lm/W	29000lm	158lm/W
60%	138W	70	24000lm	174lm/W	23000lm	167lm/W
40%	92W	70	16500lm	179lm/W	16000lm	174lm/W

Electrical Data

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	800	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
1	1150	150	120	1.25
		150	208	0.72
		150	240	0.63
		150	277	0.54
1	1700	210	120	1.75
		210	208	1.01
		210	240	0.88
		210	277	0.76
1	1750	230	120	1.92
		230	208	1.11
		230	240	0.96
		230	277	0.83



Dimensions & Weight

100W / 150W

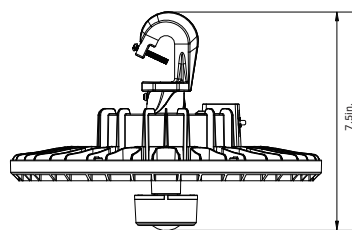

Weight:
100W: 3.68lb.
150W: 3.68lb.

210W / 230W

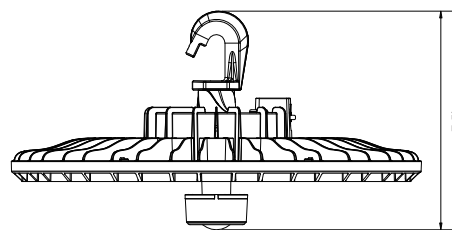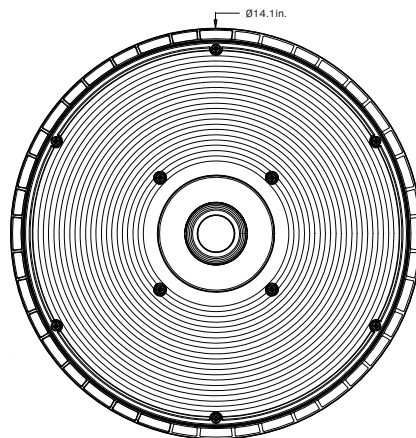

Weight:
210W: 6.53lb.
230W: 6.53lb.

Mounting Options



HOOK MOUNT

Included hook mount features an anti-shedding screw for added security.



PENDANT MOUNT

A 3/4" conduit entry point ensures easy pendant installation. Conduit adaptor is required for pendant mounting (as shown below under Accessories).



ADJUSTABLE SURFACE MOUNTING BRACKET

Field-installed bracket allows precise aiming of the fixture to 0°, 30°, 60°, 90°, 120°, 150°, or 180°.

Accessories



PIR MOTION SENSOR

Optional field-installed, center-mounted plug & play PIR multi-level motion sensor detects occupancy in an area for additional energy savings. Remote required to change default motion sensor settings.



BLUETOOTH NLC LISTED PIR MOTION SENSOR

Optional field-installed, center-mounted plug & play Bluetooth PIR motion sensor adds Networked Control functionality utilizing a Bluetooth SIG mesh network operated with iOS, Android, and web.



MOTION SENSOR REMOTE CONTROL

Optional remote control is required to program the motion sensor with advanced lighting control options.




CONDUIT ADAPTOR

Optional adaptor allows conduit pendant mounting. The adaptor screws into the 3/4" hole on the top of the fixture and is used to guide the power and dimming cords into the conduit (extended lead time).



EMERGENCY BATTERY BACKUP

Optional factory-installed emergency battery backup provides up to 90 minutes of operation during power outages (extended lead time).




ALUMINUM REFLECTOR

Optional aluminum reflector provides a more focused light distribution (extended lead time).

Light Distribution

General High Bay

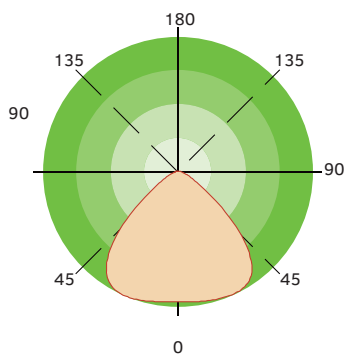

Ordering Information

Circular High Bay Series GK0HBG8								Example: GK0HBG8210W27VDDKBM		
Fixture Type	Wattage	Voltage	CCT	Finish	Sensor (Optional)	Emergency Battery (Optional)	Adjustment Dial	Internal Code		
GK0HBG8	100W 150W 210W 230W	27V 120-277V	DDK Power & CCT Selectable	B Black* D Dark Bronze W White	M With Sensor Blank Without Sensor	B With Emergency Battery Blank Without Emergency Battery	AD With Adjustment Dial Blank Without Adjustment Dial	Blank Alphanumeric 2 With 2 CCTs		

NOTE: *Default finish is black. All other finishes are special order only.



100 E. Crossroads Pkwy. Ste. C
Bolingbrook, IL 60440
Phone: 630-793-9449
Web: www.gkoled.com